

duraflo[®] PRO Ventilator



Sizes Available:



3 Tier
130 Sq. In. NFA



2 Tier
95 Sq. In. NFA



1 Tier
48 Sq. In. NFA

Extreme Weather Protection for the home
High Performance Airflow
"Easy Level" Adjustment System Reduces Installation Time

The PROVentilator combines the field tested benefits of the patented WeatherPRO internal baffle system with multi stage, high volume, airflow for superior attic ventilation.

- Pivoting top with locking pitch tabs accommodate 3/12 to 12/12 roof pitches
- **55% lighter** than traditional vents
- 48 to 130 Sq. In. NFA models
- Crush, dent & corrosion resistant
- UV & Cold impact resistant to -40
- Available in Black, Brown, Grey & Weatherwood

U.S. Patent 9,523,509



MIAMI-DADE COUNTY
APPROVED

Large top cap improves appearance

Unique baffle system wards off wind driven snow & rain

Lower drip channels allow moisture to exit

Install then adjust to roof pitch with locking tabs

Pitch adjustment stops

Lower deflectors help eliminate snow infiltration


Centralized pivot point

duraflo[®]
WE KNOW VENTILATION


Models: 60PRO150 / 60PRO140 / 60PRO130

duraflo® PRO Ventilator

Dimensions:

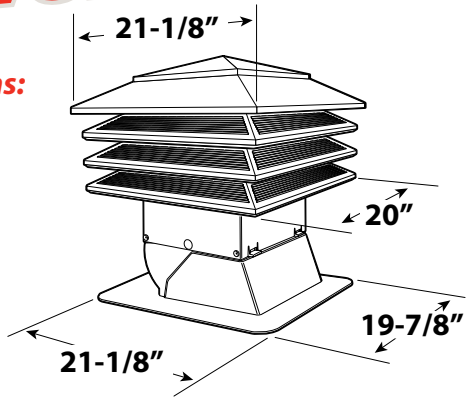


Model Heights:

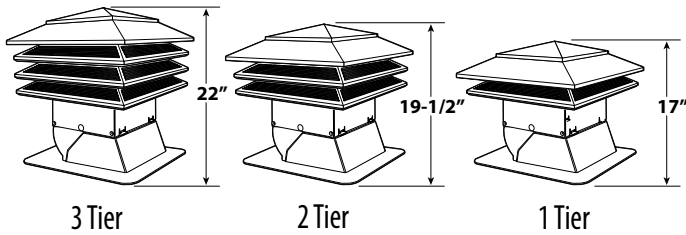

Description:

The PRO Ventilator's "Easy Level" features are engineered with the contractor in mind. The lightweight, durable construction and rotating pitch adjustment system are designed to simplify the installation process saving you time and money.



The chimney style design allows the PRO Ventilator to harness wind energy and create pressure variances that powerfully draw air out from within the attic space.

Lightweight, no-assembly design makes for easy handling. Setting the pitch is quick and simple with centralized pivot points, built-in adjustment tabs and pitch stops.

Standards:

Tested and passed the Miami Dade County TAS No. 100(A)-95 110mph/177kmh wind driven rain test




Durability:

Engineered polypropylene resists denting, crushing, extreme heat and is cold impact resistant to -40°


Specifier:

Visit **ARCAT**.com for complete 3-part master format specifications.




Weather Protection:

WeatherPRO's patented internal baffles deflect water and snow, allowing moisture to drain harmlessly out of the drainage openings. Designed for high airflow while providing excellent defense against weather infiltration.

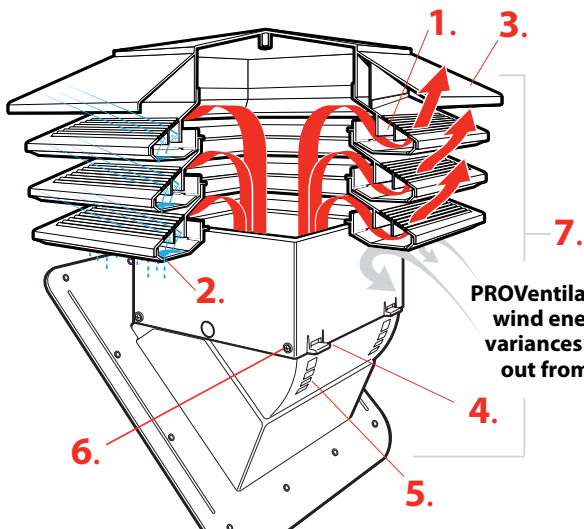

1. Unique baffle system wards off wind driven snow and rain
2. External Drip tray allows moisture to drain harmlessly away from vent openings
3. Large top cap improves appearance of the roof line
4. Easily adjust to roof pitch with front and back locking tabs
5. Multiple pivot stop points for quick leveling
6. Molded in screw guides help secure vent position quickly and accurately
7. Fully assembled – no top and base attachment required on the jobsite

PROventilator is designed to harness wind energy and create pressure variances that powerfully draw air out from within the attic space.

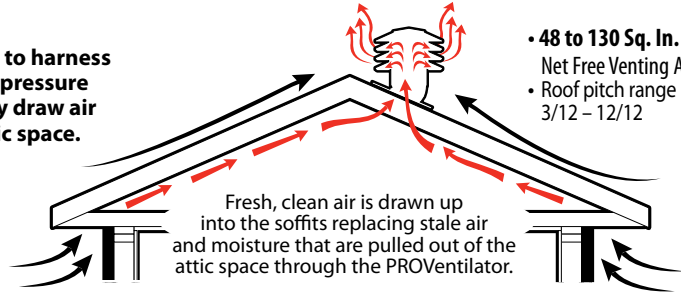

• 48 to 130 Sq. In. Net Free Venting Area
• Roof pitch range 3/12 – 12/12

3 Tier Model: 130 Sq. In. NFA				
DESCRIPTION	PART #	SIZE	CTN. QTY.	WT.CTN. (LBS.)
Black	60PRO150BL	21-1/8" x 21-1/8" x 22"	1	18
Brown	60PRO150BR		1	18
Grey	60PRO150G		1	18
Weatherwood	60PRO150WW		1	18

2 Tier Model: 95 Sq. In. NFA				
DESCRIPTION	PART #	SIZE	CTN. QTY.	WT.CTN. (LBS.)
Black	60PRO140BL	21-1/8" x 21-1/8" x 19-1/2"	1	16
Brown	60PRO140BR		1	16
Grey	60PRO140G		1	16
Weatherwood	60PRO140WW		1	16

1 Tier Model: 48 Sq. In. NFA				
DESCRIPTION	PART #	SIZE	CTN. QTY.	WT.CTN. (LBS.)
Black	60PRO130BL	21-1/8" x 21-1/8" x 17"	1	12
Brown	60PRO130BR		1	12
Grey	60PRO130G		1	12
Weatherwood	60PRO130WW		1	12



Eastern U.S. Customers
Tel: (289) 881-0120
Toll Free: 1-800-463-9572
Fax: (905) 844-0826
www.ipexna.com | sales@ipexamerica.com

Western U.S. Customers
Tel: (303) 373-1918
Toll Free: 1-888-461-5307
Fax: (303) 373-1923